

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number  
WO 02/28983 A1

BEST AVAILABLE COPY

(51) International Patent Classification<sup>7</sup>: C09K 11/06,  
H05B 33/14, H01L 51/20

(21) International Application Number: PCT/GB01/04381

(22) International Filing Date: 2 October 2001 (02.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0024155.4	3 October 2000 (03.10.2000)	GB
60/253,249	27 November 2000 (27.11.2000)	US
0118368.0	27 July 2001 (27.07.2001)	GB

(71) Applicant (for all designated States except US): CAM-  
BRIDGE DISPLAY TECHNOLOGY LIMITED  
[GB/GB]; Greenwich House, Madingley Rise, Madingley  
Road, Cambridge CB3 0HJ (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): CINA, Salvatore

[IT/GB]; Cambridge Display Technology Limited, Green-  
wich House, Madingley Rise, Madingley Road, Cambridge  
CB3 0HJ (GB).



(74) Agent: DANIELS, Jeffrey, Nicholas; Page White & Far-  
rer, 54 Doughty Street, London WC1N 2LS (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU,  
ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

[Continued on next page]

(54) Title: LIGHT-EMISSIVE POLYMER BLENDS AND LIGHT-EMISSIVE DEVICES MADE FROM THE SAME

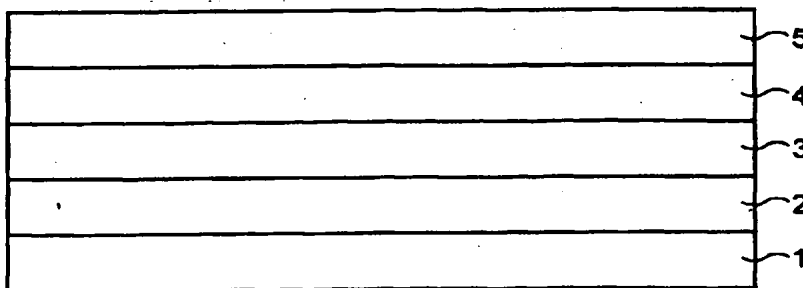

(I)



(II)

(57) Abstract: A polymer blend comprising a first, light-emissive polymer comprising substituted or non-substituted units according to formulae (I) and (II) and a second, hole transport polymer comprising substituted or non-substituted fluorene units according to formula (I) and substituted or non-substituted triarylamine units, wherein the molecular weights of the first and second polymers and the blending ratio of the first and second polymers are selected such that, in use in a light-emissive device, the luminance of the emitted light at a bias of 5V is no less than 20,000 cd/m<sup>2</sup> formula (I) (II): wherein R' is independently in each occurrence H, C<sub>1</sub>-C<sub>20</sub> hydrocarbyl or C<sub>1</sub>-C<sub>20</sub> hydrocarbyl containing one or more S, N, O, P or Si atoms, C<sub>4</sub>-C<sub>16</sub> hydrocarbyl carbonyloxy, C<sub>4</sub>-16 aryl(trialkylsiloxy) or both R' may form together with the 9-carbon on the fluorene ring a C<sub>5</sub>-C<sub>20</sub> cycloaliphatic structure containing one or more heteroatoms of S, N or O.

WO 02/28983 A1

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## LIGHT-EMISSIVE POLYMER BLENDS AND LIGHT-EMISSIVE DEVICES MADE FROM THE SAME


The present invention relates to novel light-emissive polymer blends, and to light-emissive devices made from such blends.

Light-emissive devices typically comprise a layer of electroluminescent material arranged between two electrodes such that charge carriers can move between the electrodes and the light-emissive material. Charge transport layers may be interposed between the layer of electroluminescent material and either or both of the electrodes.


The use of blends of conjugated polymers as the active material in light-emissive devices is disclosed in WO99/48160, WO99/54385 and WO00/46321. For example, WO99/48160 describes a device comprising an active layer comprising a tri-blend of poly(2,7-9,9-di-n-octylfluorene), poly(2,7-(9,9-di-n-octylfluorene)-3,6-benzothiadiazole) and poly(2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((4-secbutylphenylimino)-1,4-phenylene))); and WO00/046321 describes a device having an active layer comprising a bi-blend of poly(2,7-(9,9-di-n-octylfluorene)-3,6-benzothiadiazole) and a polymer comprising 9,9-di-n-octylfluorene units, benzothiadiazole units and 1,4-phenylene-((4-secbutylphenylimino)-1,4-phenylene units in a ratio of 3:2:1.

According to a first aspect of the present invention, there is provided a polymer blend comprising a first, light-emissive polymer comprising substituted or non-substituted units according to formulae (I) and (II) and a second, hole transport polymer comprising substituted or non-substituted fluorene units according to formula (I) and substituted or non-substituted triarylamine units, wherein the molecular weights of the first and second polymers and the blending ratio of the first

and second polymers are selected such that, in use in a light-emissive device, the luminance of the emitted light at a bias of 5V is no less than 20,000 cd/m<sup>2</sup>.



(I)



(II)


wherein R' is independently in each occurrence H, C<sub>1</sub>-C<sub>20</sub> hydrocarbyl or C<sub>1</sub>-C<sub>20</sub> hydrocarbyl containing one or more S, N, O, P or Si atoms, C<sub>4</sub>-C<sub>16</sub> hydrocarbyl carbonyloxy, C<sub>4</sub>-C<sub>16</sub> aryl(trialkylsiloxy). For example, each R' may be an alkyl group or an aryl group such as phenyl or biphenyl. Alternatively, both R' may form together with the 9-carbon on the fluorene ring a C<sub>5</sub>-C<sub>20</sub> cyclic such as a cycloaliphatic or a cycloaromatic structure optionally containing one or more heteroatoms of S, N or O. For example, R' may together form an additional fluorene ring to form a spirofluorene unit.

In one embodiment, the polymer blend consists essentially of the first and second polymers.

The luminance value specified above and in claim 1 refers to the luminance in a device of the kind described in detail hereafter.

According to a second aspect of the present invention, there is provided a polymer blend consisting essentially of a first, light-emissive polymer comprising substituted or non-substituted units according to formulae (I) and (II) below and a second, hole transport polymer consisting essentially of substituted or non-substituted fluorene units according to formula (I) and substituted or non-substituted triarylamine units,

and optionally one or more further hole transport polymers different to the second polymer.

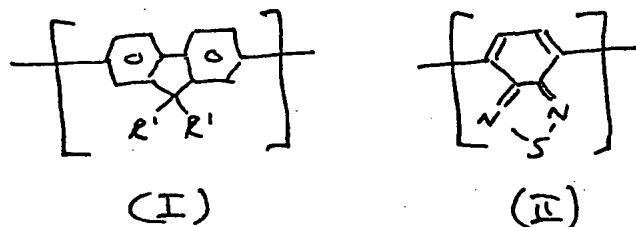

wherein R' is independently in each occurrence H, C<sub>1</sub>-C<sub>20</sub> hydrocarbyl or C<sub>1</sub>-C<sub>20</sub> hydrocarbyl containing one or more S, N, O, P or Si atoms, C<sub>4</sub>-C<sub>16</sub> hydrocarbyl carbonyloxy, C<sub>4</sub>-C<sub>16</sub> aryl(trialkylsiloxy) or both R' may form together with the 9-carbon on the fluorene ring a C<sub>5</sub>-C<sub>20</sub> cyclic structure optionally containing one or more heteroatoms of S, N or O.

The fluorene unit may also optionally be substituted at one or more other positions by a group selected from C<sub>1</sub>-C<sub>20</sub> hydrocarbyl, C<sub>1</sub>-C<sub>20</sub> hydrocarbyloxy, C<sub>1</sub>-C<sub>20</sub> thioether, C<sub>1</sub>-C<sub>20</sub> hydrocarbylcarbonyloxy or cyano. The fluorene unit is preferably unsubstituted (i.e. has hydrogen atoms) at all other positions.

The benzothiadiazole unit may also be optionally substituted at either or both the carbons available for substitution with groups independently selected from C<sub>1</sub>-C<sub>20</sub> hydrocarbyl, particularly C<sub>1</sub>-C<sub>20</sub> alkyl, or C<sub>1</sub>-C<sub>20</sub> hydrocarbyl containing one or more S, N, O, P or Si atoms, C<sub>4</sub>-C<sub>16</sub> hydrocarbyl carbonyloxy, C<sub>4</sub>-C<sub>16</sub> aryl(trialkylsiloxy). It is preferably unsubstituted, i.e. has hydrogen atoms at each of the two carbon atoms available for substitution.

The triarylamine unit preferably comprises two aryl groups that are linked together by a nitrogen atom and form part of the polymer chain and a third aryl group which is also bonded to the nitrogen atom and is pendant from the polymer chain. The triarylamine unit may be substituted at one or more positions on the pendant aryl

group with one or more groups R'' independently selected from C<sub>1</sub>-C<sub>20</sub> alkyl (particularly trifluoromethyl), C<sub>1</sub>-C<sub>20</sub> alkoxy or a group of the formula -CO<sub>2</sub>R''' wherein R''' is a C<sub>1</sub>-C<sub>20</sub> alkyl.

The term "hole transport polymer" refers to a polymer which conducts mainly holes inside the polymer blend.

The proportion of the first polymer in the polymer blend is preferably in the range of 50 to 75 weight percent, further preferably in the range of 60 to 70 weight percent.

The first polymer preferably has a peak molecular weight (Mp) in the range of 150,000 to 300,000, and a number-average molecular weight (Mn) in the range of 70,000 to 180,000, as measured by size exclusion chromatography calibrated with polystyrene standard.

If the device is used as part of a passive matrix display, it is preferred that the proportion of the first polymer in the polymer blend is at least 70%.

According to another aspect of the present invention, there is provided a light-emissive device comprising a layer of a light-emissive material interposed between first and second electrodes such that charge carriers can move between the first and second electrodes and the light-emissive material, wherein the light-emissive material comprises a polymer blend according to either the first or second aspects of the present invention. According to another aspect of the present invention, there is provided a passive matrix display comprising such a light-emissive device.

An embodiment of the present invention is described hereunder, by way of example only, with reference to the accompany drawings, in which:-

Figure 1 is a schematic view of a light-emissive device;  
Figures 2 and 3 are graphs showing the improved performance of a device according to the present invention compared to a conventional device; and  
Figure 4 shows the structure of the component polymers of a polymer blend according to an embodiment of the present invention;

With reference to Figure 1, a device according to an embodiment of the present invention has a glass substrate 1, a patterned ITO layer ( $16\text{mm}^2$  pixel) 2 provided on the glass substrate, a layer of a hole transport polymer such as polyethylene dioxythiophene doped with polystyrene sulphonic acid (PEDOT:PSS) 3 provided on the ITO-patterned glass substrate, a layer 4 of a polymer blend consisting of 70 weight percent of an alternating polymer of 9,9'-dioctylfluorene units and benzothiadiazole units (F8BT) as shown in Figure 4a, and 30 weight percent of an alternating polymer of 9,9'-dioctylfluorene units and triphenylamine units (TFB) as shown in Figure 4b formed over the hole transport polymer layer, and a cathode 5 formed on the polymer blend layer 4.

The F8BT polymer has an  $M_p$  of 220,000 and an  $M_w$  of 123,000; and the TFB polymer has an  $M_p$  of 102,000 and an  $M_w$  of 52,000. The  $M_p$  and  $M_w$  were measured by GPC in tetrahydrofuran against a polystyrene standard.

The PEDOT:PSS layer is deposited on the ITO-patterned substrate from a solution composed of PEDOT(10):PSS(1.45):H<sub>2</sub>O(8) to a thickness of about 65nm. The thickness of the polymer blend layer 4 is also about 65nm. The polymer blend is also deposited by spin coating. The cathode comprises a 30nm layer of calcium capped with a 300nm layer of aluminium. The cathode is deposited by evaporation.

In another embodiment, the cathode may include a layer of samarium, ytterbium or cerium instead of calcium (samarium is a preferred alternative for calcium) and/or

may further comprise a layer of lithium fluoride interposed between the layer of calcium and the polymer blend layer 4.

The device described above exhibits high peak efficiency and low turn-on voltage (1.9V).

Figure 2 clearly shows that the same brightness can be achieved at a lower voltage compared to the conventional device. For example, the brightness achieved is 10000 Cd/m<sup>2</sup> at 3.2V (or 1000Cd/m<sup>2</sup> at 2.3V) and 35000Cd/m<sup>2</sup> at 5V. As shown in Figure 2, these brightnesses are much larger than those obtained at the same voltages with a corresponding device having an active layer made from a conventional polymer blend comprising a polyfluorene, a fluorene-benzothiadiazole copolymer and a fluorene-triarylamine copolymer.

Furthermore, as is clear from Figure 3, the drop-off in efficiency with increasing brightness is less pronounced compared to the conventional device.


The luminance and efficiency values are based on a measurement using a silicon photodiode of the amount of emitted light transmitted through the glass substrate. Any emitted light that is waveguided within the device and is transmitted out of the device other than through the glass substrate is not taken into account.

This improved performance is particularly significant in the context of pulsed passive matrix displays. All other things being equal, capacitive loss in these displays is proportional to  $V^2$ , where  $V$  is the drive voltage. The capability to use a lower drive voltage to achieve the same brightness is highly desirable from the point of view of minimising power dissipation, and may help to simplify the construction of the drive circuit.




## CLAIMS

1. A polymer blend comprising a first, light-emissive polymer comprising substituted or non-substituted units according to formulae (I) and (II) and a second, hole transport polymer comprising substituted or non-substituted fluorene units according to formula (I) and substituted or non-substituted triarylamine units, wherein the molecular weights of the first and second polymers and the blending ratio of the first and second polymers are selected such that, in use in a light-emissive device, the luminance of the emitted light at a bias of 5V is no less than 20,000 cd/m<sup>2</sup>.



(I)




(II)

wherein R' is independently in each occurrence H, C<sub>1</sub>-C<sub>20</sub> hydrocarbyl or C<sub>1</sub>-C<sub>20</sub> hydrocarbyl containing one or more S, N, O, P or Si atoms, C<sub>4</sub>-C<sub>16</sub> hydrocarbyl carbonyloxy, C<sub>4</sub>-C<sub>16</sub> aryl(trialkylsiloxy) or both R' may form together with the 9-carbon on the fluorene ring a C<sub>5</sub>-C<sub>20</sub> cyclic structure optionally containing one or more heteroatoms of S, N or O.

2. A polymer blend according to claim 1 wherein the polymer blend consists essentially of the first and second polymers.

3. A polymer blend according to claim 1 or claim 2 wherein the triarylamine units of the second polymer include one or more types of triarylamine units selected from the group consisting of those according to the following formulae (III) – (VI):

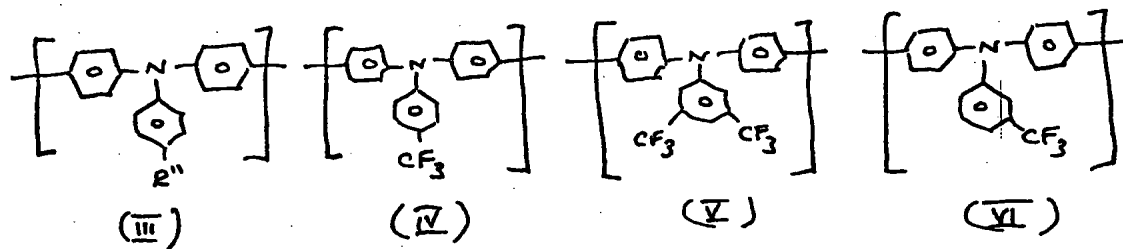

wherein  $R''$  is independently in each occurrence carboxyl,  $C_1$ - $C_{20}$  alkyl,  $C_1$ - $C_{20}$  alkoxy or a group of the formula  $-CO_2R'''$  where in  $R'''$  is a  $C_1$ - $C_{20}$  alkyl.

4. A polymer blend according to claim 3 wherein the second polymer consists of fluorene units and units according to formula (III) of claim 3.

5. A polymer blend according to claim 1 wherein the second polymer comprises alternating fluorene and triarylamine units.

6. A polymer blend according to any preceding claim wherein the proportion of the first polymer in the polymer blend is in the range of 50 to 75 weight percent.

7. A polymer blend according to any preceding claim wherein the proportion of the first polymer in the polymer blend is at least 70 weight percent.


8. A polymer blend according to any preceding claim wherein the molecular weights of the first and second polymers and the blending ratio of the first and second polymers are selected such that, in use in a light-emissive device, the efficiency at a luminance of 30,000  $cd/m^2$  is no less than 70% of the peak efficiency.

9. A light-emissive device comprising a layer of a light-emissive material interposed between first and second electrodes such that charge carriers can move between the first and second electrodes and the light-emissive material, wherein the light-emissive material comprises a polymer blend according to any preceding claim.


10. A passive matrix display comprising a light-emissive device according to claim 9.

11. The use of a light-emissive device according to claim 9 in a passive matrix display.

12. A polymer blend consisting essentially of a first, light-emissive polymer comprising substituted or non-substituted units according to formulae (I) and (II) below and a second, hole transport polymer consisting essentially of substituted or non-substituted fluorene units according to formula (I) and substituted or non-substituted triarylamine units, and optionally one or more further hole transport polymers different to the second polymer.



(I)



(II)

wherein R' is independently in each occurrence H, C<sub>1</sub>-C<sub>20</sub> hydrocarbyl or C<sub>1</sub>-C<sub>20</sub> hydrocarbyl containing one or more S, N, O, P or Si atoms, C<sub>4</sub>-C<sub>16</sub> hydrocarbyl carbonyloxy, C<sub>4</sub>-C<sub>16</sub> aryl(trialkylsiloxy) or both R' may form together with the 9-carbon on the fluorene ring a C<sub>5</sub>-C<sub>20</sub> cyclic structure optionally containing one or more heteroatoms of S, N or O.

13. A polymer blend according to claim 9 wherein the third polymer comprises triarylamine units different to those contained in the second polymer and fluorene units.

14. A polymer blend according to claim 9 wherein the triarylamine units contained in the third polymer include one or more triarylamine units selected from the group consisting of those according to formulae (III) to (VI) of claim 3.

15. A light-emissive device comprising a light-emissive material interposed between first and second electrodes such that charge carriers can move between the first and second electrodes and the light-emissive material, wherein the light-emissive material comprises a layer of a polymer blend according to any of claims 12 to 14.

16. A light-emissive device according to claim 9 or claim 15 wherein the cathode comprises a layer of calcium, samarium, cerium or ytterbium.

1 / 3

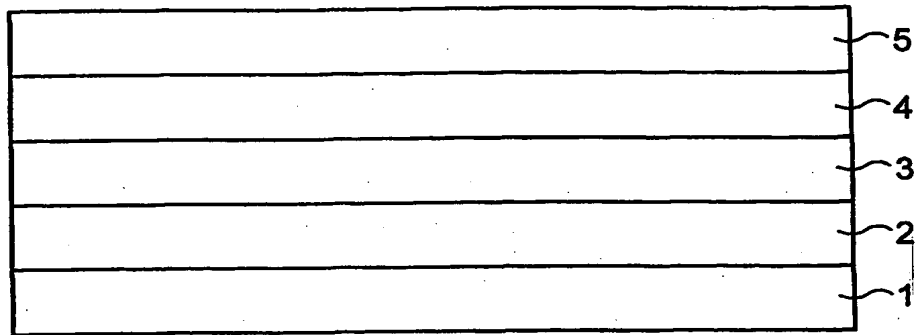


FIG. 1

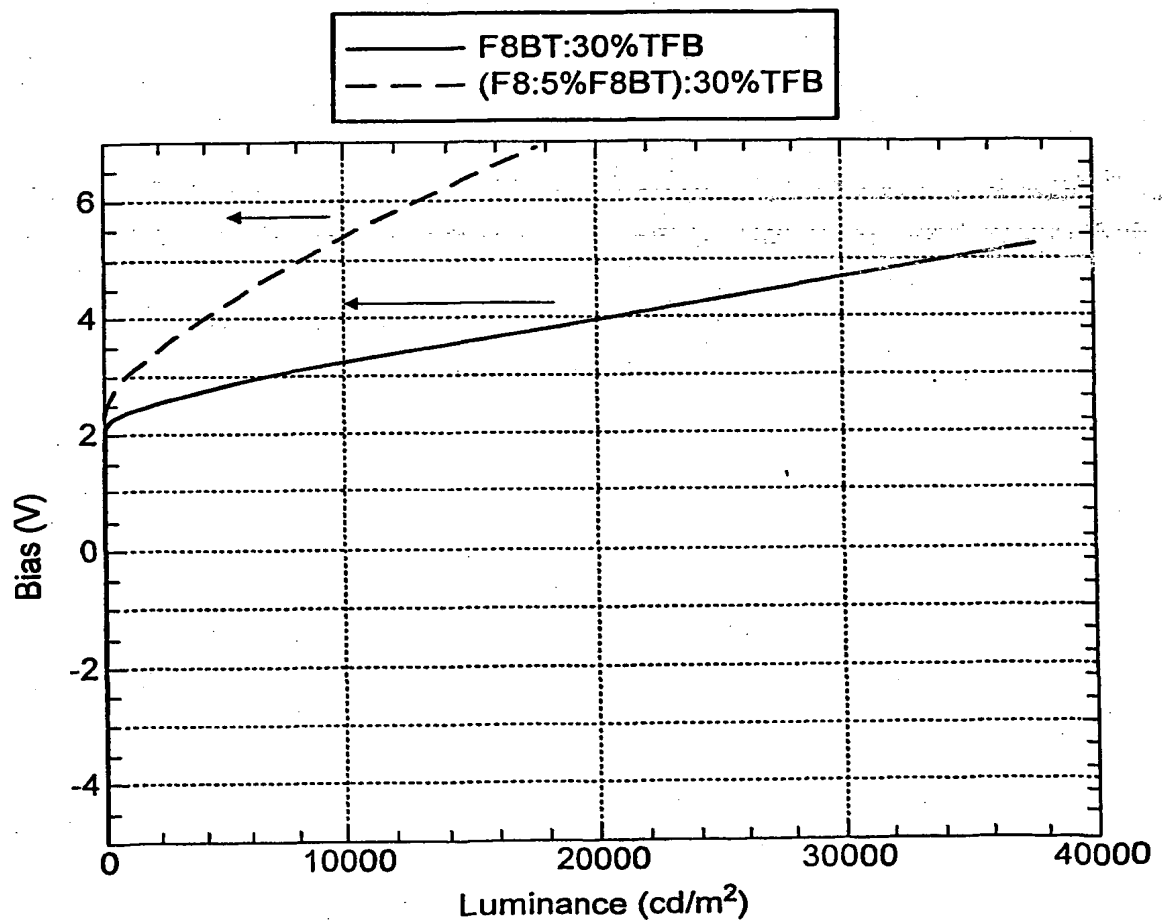
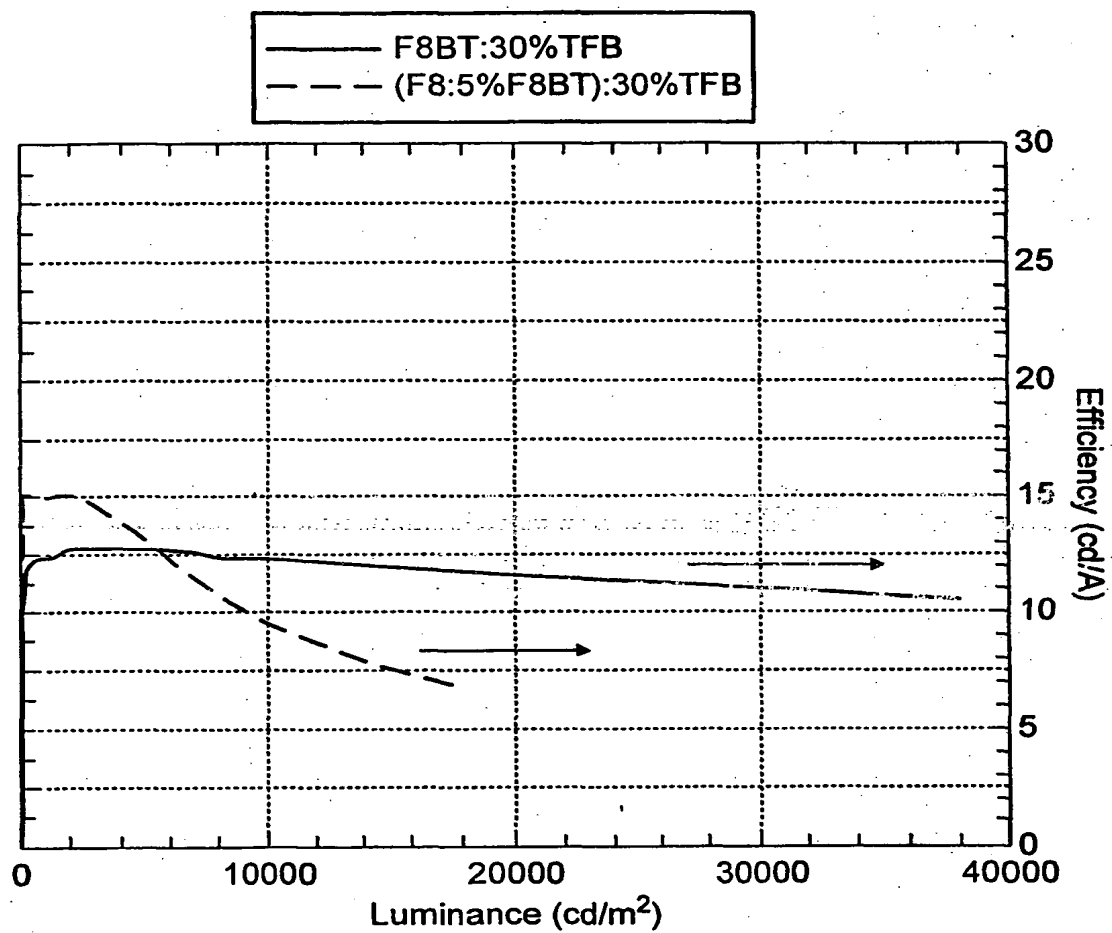


FIG. 2

2 / 3

**FIG. 3**

3 / 3

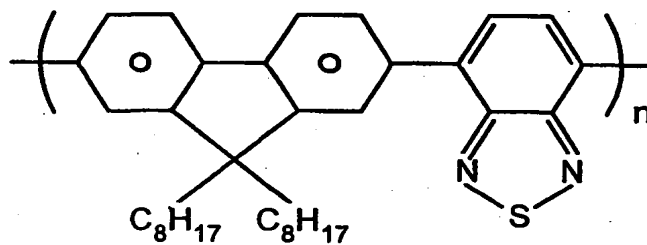


FIG. 4a

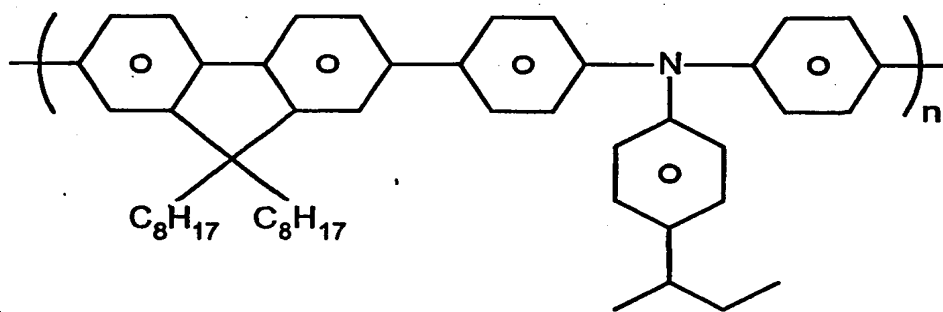


FIG. 4b

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 C09K11/06 H05B33/14 H01L51/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C09K H05B H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 48160 A (BRIGHT CHRISTOPHER JOHN ;DEVINE PETER (GB); BURROUGHES JEREMY HENL) 23 September 1999 (1999-09-23) cited in the application the whole document	1-16
X	WO 00 55927 A (TOWNS CARL ROBERT ;DELL RICHARD O (GB); CAMBRIDGE DISPLAY TECH (GB) 21 September 2000 (2000-09-21) claims 44-54,60-65	1-16
X	WO 99 54385 A (DOW CHEMICAL CO) 28 October 1999 (1999-10-28) cited in the application claims 1-16; table 1	1-16

-/-

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the International filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&\* document member of the same patent family

Date of the actual completion of the international search

8 January 2002

Date of mailing of the international search report

15/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Lehnert, A



## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 46321 A (DOW CHEMICAL CO) 10 August 2000 (2000-08-10) cited in the application the whole document	1-16

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 9948160	A	23-09-1999	AU	2740299 A	11-10-1999
			CN	1293826 T	02-05-2001
			EP	1062703 A1	27-12-2000
			WO	9948160 A1	23-09-1999
WO 0055927	A	21-09-2000	AU	2740299 A	11-10-1999
			AU	3177700 A	04-10-2000
			EP	1062703 A1	27-12-2000
			WO	0055927 A1	21-09-2000
WO 9954385	A	28-10-1999	US	6309763 B1	30-10-2001
			CN	1263542 T	16-08-2000
			EP	0988337 A1	29-03-2000
			WO	9954385 A1	28-10-1999
			US	2001026878 A1	04-10-2001
WO 0046321	A	10-08-2000	EP	1155096 A1	21-11-2001
			WO	0046321 A1	10-08-2000

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are **accurate** representations of the original documents submitted by the applicant.

Defects in the images include but are **not** limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**